


PRODUCT DESCRIPTION FORM

PRODUCT CODE:TLM 003

MDROAPSLTUHG-S,MDROAPSLTUHG-M,MDROAPSLTUHG-L,MDROAPSLTUHG-XL,

PRODUCT NAME:SMS 40 GR GOWNS

PRODUCT DESCRIPTION FORM

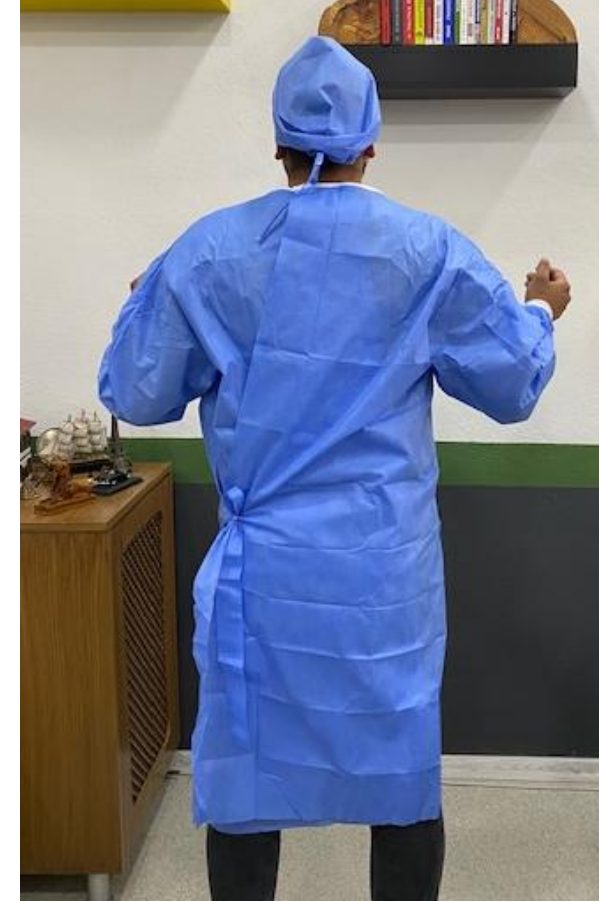


MANUFACTURING DETAILS:

PRODUCT DESCRIPTION FORM

4 BELTS ON IT WITH SURGICAL SAWING STYLE
BELT SIZES: 3,50 CM X 60 CM

WRISTBAND: 8,50 CM X 7CM WHITE %100 POLYESTER ELASTIC

VELCRO: 2 CM X 3,50 CM WHITE


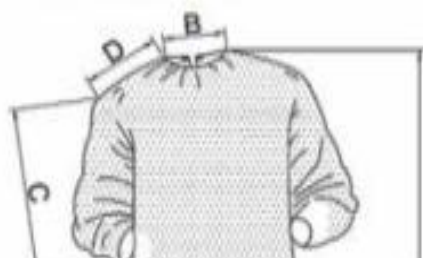


AND, Huippu Group

Season:
Cut surface:

2020
19809,60 cm²

Pieces display cut total:
Cut perimeter:

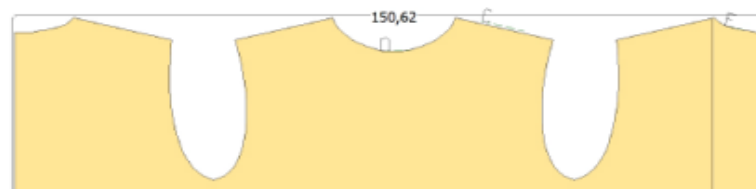

PRODUCT DESCRIPTION FORM

SIZES / ÖLÇÜLER

	S	M	L	XL	XXL	XXXL
A	110,0	115,0	120,0	123,0	130,0	140,0
B	31,0	32,0	33,5	34,0	34,5	35,0
C	55,0	56,0	59,0	60,0	60,5	61,5
D	17,5	18,5	19,5	20,0	21,0	22,0
E						
F	145,0	150,0	155,0	160,0	165,0	167,0
G						
H						

Not: Değerler "cm" cinsinden yazılmıştır.

Tolerans % ± 2

FABRIC DETAILS:

GRAMS::40 GR/MT2 SMS


COLOUR:MEDICAL BLUE

MANUFACTURER:BAYTEKS,TEKNOMELT,GÜLSAN, GENERAL

		DOC.NO		F32
		PAGE NO		1
		REV.NO		0
		REV.DATE		00.01.1990
TECHNICAL DATA SHEET				
Product : Polypropylene				
Product Description : ENDLESS FILAMENTS MELTBLOWN, THERMALLY BONDED.				
Raw Material : 100 % PP				
Application on Fabric : SMS /HYDROPHOBIC				
Treatment :				
Fabric Colour : MEDICAL BLUE				
Customer Name :				
Weight : 43 GSM				
Width :				
Packing : PE BAG WITH LABEL				
PROPERTIES		TEST METHOD	UNIT	TARGET
WEIGHT		NWSP 130.1.R0 (15)	gsm	43
THICKNESS		NWSP 120.1.R0 (15)	mm	0,38
TENSILE STRENGTH		MD NWSP 110.4.R0 (15)	N/5 cm	117,0
		CD		86,0
ELONGATION AT BREAK		MD NWSP 110.4.R0 (15)	%	139,0
		CD		126,0
HYDROSTATIC HEAD		NWSP 080.6.R0(15)	mm	435,0
Tolerances For The Average Results				
Weight		$\pm 5 \%$		
Thickness		$\pm 10 \%$		
Tensile Strength		$\pm 15 \%$		
Elongation		$\pm 15 \%$		
Hydrostatic Head		$\pm 15 \%$		
Liquid Strike-Through Time		$\pm 0,5 \%$		
Air Permeability		$\pm 20 \%$		
Absorption		$\pm 20 \%$		
Roll Tolerance				
Length : $-0 / +5\%$ against target / ordered length				
Width : Up to 150 cm in width = $-0mm/+5mm$ Over 150 cm in width = $-0mm/+10$				
Splice : Maximum five splices per roll				
The product is wound onto cardboard cores and then wrapped in polyethylene film. Bar code labels with product code, description and lot details are applied to the outside of each pack and a small label is applied to each roll. Suitable sized rolls may be palletised and the pallet load cling-wrapped				
Preparation Date		QUALITY CONTROL APPROVAL		
01.04.2020				

BORCHUURE AND PACKAGING:

PACKING SINGLE WITH BROCHURES INTO THE 30X45 OPP PLASTIC BAG

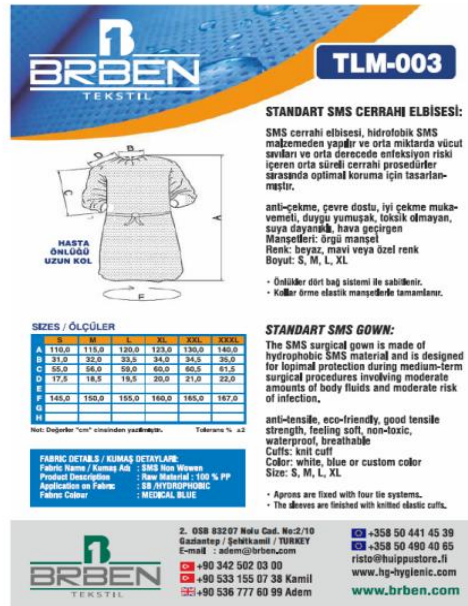

PRODUCT DESCRIPTION FORM

BOX AND PALLETS:

BOX SIZE: 60X40X40

EACH BOX 60 PCS

EACH PRODUCT 120 GR +4-5 %5 GRMS

EACH BOX 9 KGS

EACH PALLET 100X120 CM AND 2,10 MT H

EACH PALLET 25 BOXES (1500 PRODUCTS)

DETAILED BOX LABEL ON IT

